


# What is Surface Filtration?

Pleated filters are widely used as effective surface filtration due to their excellent flow rates and high efficiency.

Pleating dramatically increases available surface area whilst maintaining high dirt loading and low pressure drops. Much of the media used in pleated cartridges also has some depth characteristics, thanks to its multi-layer construction, thereby aiding particle retention and classification.

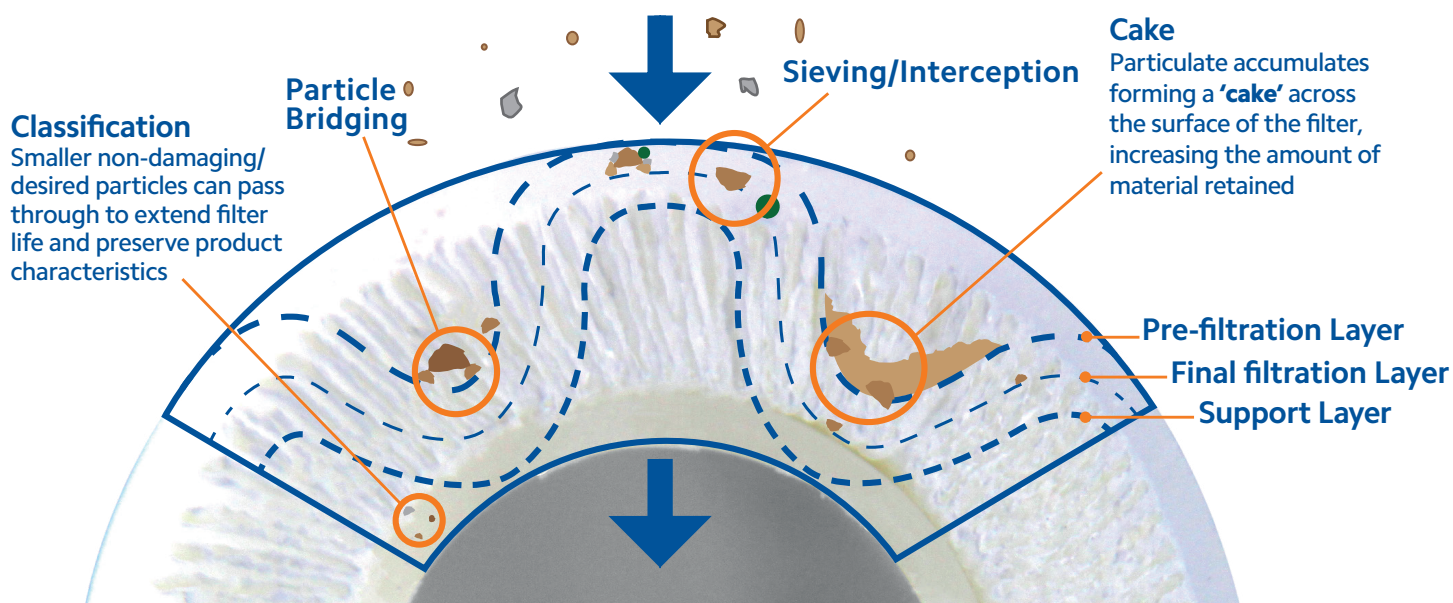


## Surface Filtration Technology

Pleated filters are the ideal technology of choice over depth filtration for retention of known or uniformly sized particles.

The Standard (SPE) range of cartridges features a single layer media, which filters on the principles of direct interception and 'caking' where multiple particles accumulate across the media pore. Over time this leads to partial closure, which can increase efficiency and the chance to target finer particles.

The entire Premier range includes support and pre-filtration layers providing an element of depth characteristics. These layers retain larger particles, ensuring the specified micron rating of the cartridge can be utilised for exacting classification.

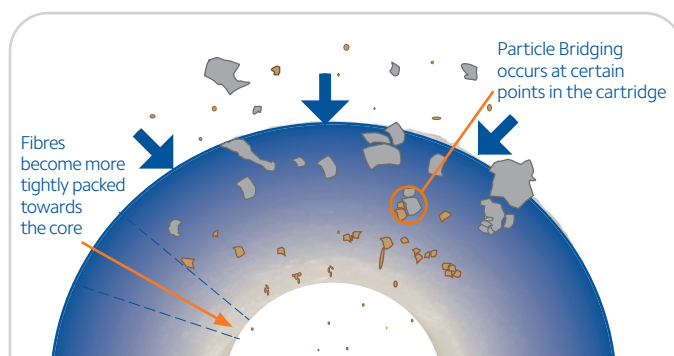

## Depth Filtration Technology

The fibres become more tightly packed throughout a depth cartridge, progressively reducing the size of particles that can pass through the filter.

**Advantage:** Economic to produce.

**Disadvantage:** Higher pressure drop means a shorter service life compared to pleated cartridges.

# Premier Pleat Construction

The Premier Pleat, Crypto and Bubble Point ranges are all constructed with a rigid inner and outer polypropylene core. Offering protection for the pleat pack, the cage also allows a variety of end-caps to be thermally bonded to the cartridge. This secure construction technique prevents bypass, creating a seal strong enough for repeated steam or chemical sterilisation as well as cartridge integrity testing.

Developments in 2018 see a new outer cage design that increases its void volume by over 10%. Whilst maintaining cartridge strength, increasing the open area allows a more uniform distribution of flow across the entire pleat pack ensuring low pressure drop and maximised dirt holding capacity.



## Outer support cage

- Provides product strength and rigidity.
- Protects the pleat pack, ensuring media integrity.
- New outer cage design with increased void volume.

## Inner support cage

- End-caps are bonded to the support core for product security and strength, ensuring no bypass and enabling integrity testing.

## Media

- Pleated construction increases surface area, delivering high flow rates, low initial clean pressure drop and optimised dirt holding.
- Designed with an optimum balance of filtration media and void volume, the pleat pack is engineered to ensure that the entire surface area of the cartridge is used, maximising dirt holding capability whilst maintaining high flow rates and low pressure drop.

## Thermally bonded end-cap

- No adhesive ensures no leaching of additives.
- Numerous end-caps and seals available to suit various housings (refer to pages 32 and 33).

## Identification

### Lot Coded

- Laser etched lot code on cartridge
- Traceable back to raw materials

### QR Code

- Links directly to further information for each product


### Barcode

- Product traceability
- Stock management integration

## Packaging

### Four Protective Layers

- Vacuum sealed inner packaging
- Tough outer polybag layer provides additional protection
- Individual product boxes
- Heavy duty outer carton

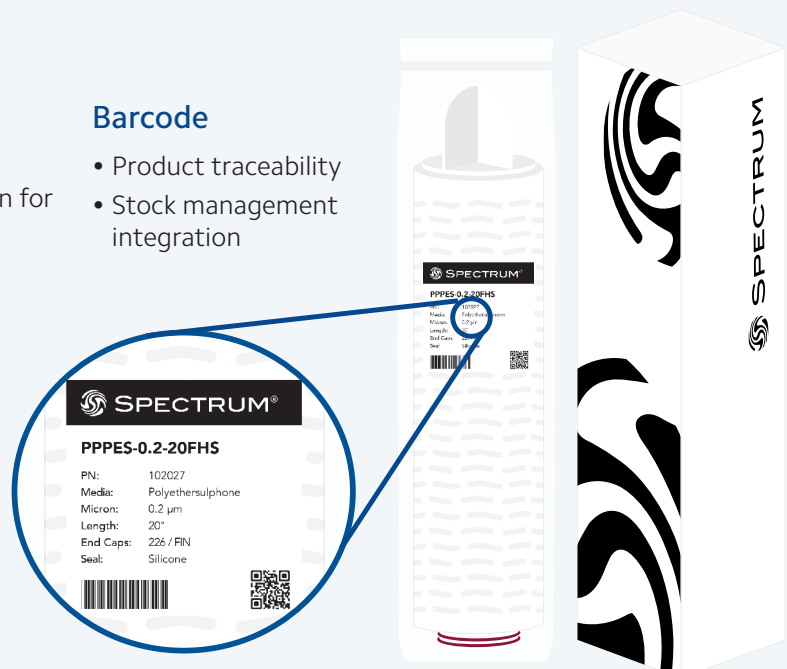

## SPECTRUM®

### PPPE-0.2-20FHS

PN: 102027  
Media: Polyethersulphone  
Micron: 0.2 µm  
Length: 20"  
End Caps: 226 / FIN  
Seal: Silicone



# Targeted Particulate Removal



 SPECTRUM

## Premier Pleat Polypropylene 0.1-100 micron

Many applications benefit from using the high efficiency, large surface area, low pressure drop and inert properties of the WRAS approved Premier Pleat Polypropylene cartridge. Four pleated media layers combine to construct a pleat pack with depth characteristics and the main filtration media layer delivers high efficiency and exacting micron classification. A specifically engineered cage construction delivers improved flow dynamics and is designed to protect the integral pleat pack whilst providing overall rigidity and strength to the cartridge.

The most popular and versatile cartridge in the Premier Pleat range, the PPP, provides exacting classification for targeted particulate removal, with a wide variety of end-caps, lengths and configurations available, ensuring a dependable and adaptable solution.

WRAS approved and constructed from FDA compliant materials, the PPP delivers high flow rates with low pressure drop. An optimal surface area of 0.56 m<sup>2</sup> per 10", the pleat pack contains a balance of media and void space for uniform particulate distribution and maximised use of the filter area.



### General Classification

The PPP provides effective particle classification as well as pre-treatment for absolute membrane media filtration downstream.



### Chemical

Inert polypropylene is resistant to a variety of solutions and chemicals, making the PPP the ideal choice for the chemical industry.




### Beverage

High efficiency filtration is key to removing contaminants from the final spirit which improves aesthetics and clarity of the bottled product.


## Four Layer Pleated Media

The four layers of material create a filtration media that offers some depth characteristics along with the benefits of an exact classification of the filtrate. With a 95-99% efficient main filtration layer, additional pre-filtration and support layers result in a cartridge with overall high dirt holding capacity and effective contaminant removal.

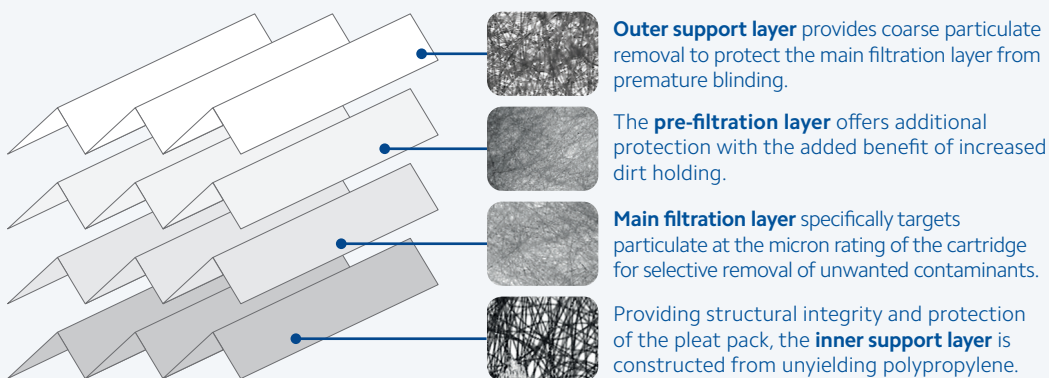

## Hygiene and Traceability

- Manufactured in a clean room environment, protecting against unwanted contaminants.
- Each cartridge has double layered packaging. The inner plastic wrap is vacuum sealed and a tough outer layer provides further protection and cleanliness.
- Individually labelled and boxed for security and ease of product identification.

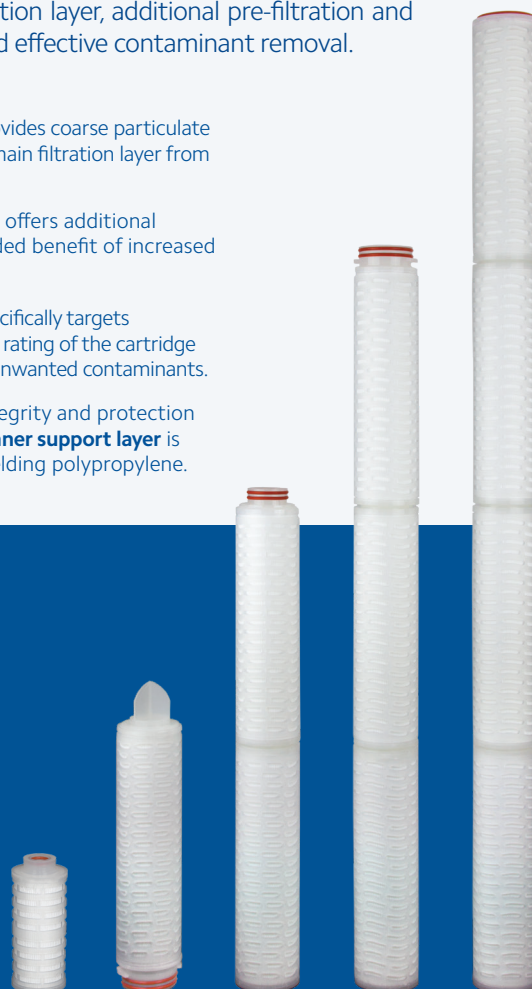

The removal efficiency of a filter is dependent on the criteria at which it is tested, along with the size and type of particulate challenge. The below table shows the efficiency of each PPP when using particle count analysis with AC Fine and AC Coarse Test Dust at various particulate challenges.

		Challenge Particulate Size										
		0.1 μm	0.2 μm	0.45 μm	1 μm	3 μm	5 μm	10 μm	20 μm	30 μm	50 μm	100 μm
Cartridge Micron Rating	0.1 μm	95%	96%	98%	99%	99%	99%					
	0.2 μm	93%	95%	97%	98%	98%	99%					
	0.45 μm	82%	88%	96%	97%	98%	99%	99%				
	1 μm	80%	82%	94%	96%	97%	98%	99%	99%			
	3 μm				86%	96%	97%	98%	98%	99%		
	5 μm					90%	96%	97%	98%	99%	99%	
	10 μm							97%	98%	98%	99%	99%
	20 μm							91%	97%	98%	99%	99%
	30 μm								97%	97%	98%	99%
	50 μm									96%	97%	98%
100 μm										95%	97%	

### Standard Diameter

With over 2000 possible configurations, the 70mm diameter range has the greatest diversity of micron ratings, lengths and end-caps available.






### Large Diameter

The PPP-LD, in 93/4" and 20", offers compact high efficiency filtration for flow rates up to 3 times the equivalent 70mm diameter cartridge.



### Junior

Designed to retrofit Filterite LMO, Advanta and Nuclepore housings.

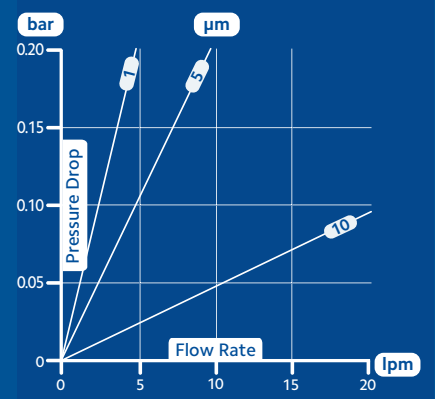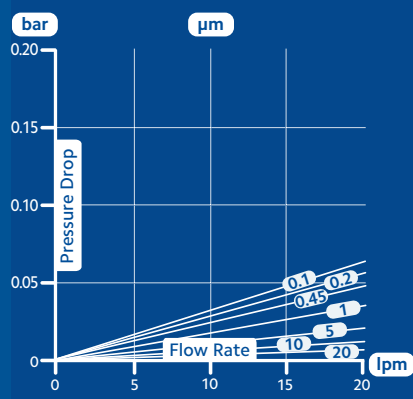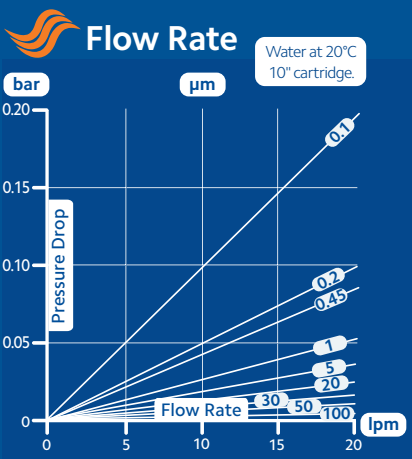

Water at 20°C, 10" cartridge.

## Materials of Construction

**Filter Media**  
Polypropylene

**Core**  
Polypropylene

**Support Media**  
Polypropylene

**Cage**  
Polypropylene

**End-cap**  
Polypropylene  
Polypropylene with PSU ring insert (Z)  
Polypropylene with SS ring insert (Q)

**Seal**  
Silicone (as standard)

## Configurations

### Micron (µm)

0.1	0.2	0.45	1	3	5	10
20	30	50	100			

### Length (")

4 <sup>7</sup> / <sub>8</sub>	9 <sup>3</sup> / <sub>4</sub>	10	20	30	40
5 = Junior					

### End-cap

AA	CG	EG	EH	FG	FH	MG
MH	QG	ZH	120			

### Seal

S = Silicone	E = EPDM	V = Viton®
--------------	----------	------------

### Diameter

Regular	Large = LD
---------	------------

## Specification

**Efficiency**  
95-99%


**Max. Operating Temperature**  
82°C

**Max. Sterilising Cycles**  
5 x 20 min cycles at 120°C  
Requires compatible end-caps Q (222) and Z (226). Not applicable for Junior and Large Diameter cartridges.

**Surface Area**  
0.56 m<sup>2</sup> per 10"  
1.55 m<sup>2</sup> per 10"BB  
0.26 m<sup>2</sup> per Junior

**Max. Operating Pressure Differential**  
6 bar at 21°C

## Dimensions

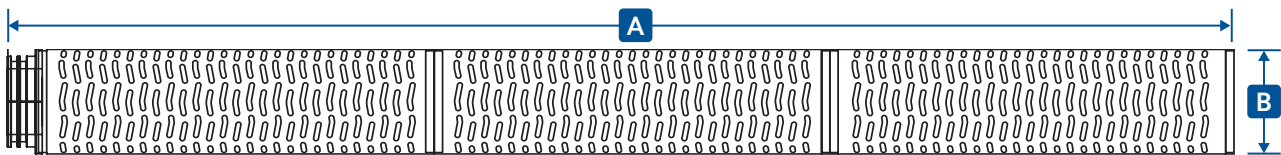

Length (")	A (mm)						B (mm)
	AA	CG	EG/FG/MG	QG	EH/FH/MH/ZH	120	
4 <sup>7</sup> / <sub>8</sub>	125	114	-	-	-	-	70
5 (Junior)	-	-	-	-	-	136	55
9 <sup>3</sup> / <sub>4</sub>	248	-	-	-	-	-	70
10	-	241	270	276	310	-	70
20	508	506	520	526	560	-	70
30	750	-	770	776	810	-	70
40	1000	-	1020	1026	1060	-	70
9 <sup>3</sup> / <sub>4</sub> LD	248	-	-	-	-	-	115
20LD	508	-	-	-	-	-	115

## Part Number

Code	Micron	Length	End-cap	Seal
PPP	0.1, 0.2, 0.45, 1, 3, 5, 10, 20, 30, 50, 100	4 <sup>7</sup> / <sub>8</sub>	AA, CG	S, E, V
		9 <sup>3</sup> / <sub>4</sub>	AA	
		10, 20, 30, 40	AA, CG, EG, EH, FG, FH, MG, MH, QG, ZH	
	0.1, 0.2, 0.45, 1, 5, 10, 20	9 <sup>3</sup> / <sub>4</sub> LD, 20LD	-	-
	1, 5, 10	5 (Junior)	120	S

e.g. PPP-5-20AAS